



LED RECESSED DOWNLIGHT



VBL-102-1-xx-xK



Trim Colour




Features/Benefits

- Modern design die-cast aluminum body
- 20° gimbal rotatable
- Available in 3000K (Warm White) and 5000K (Natural White)
- Environmentally friendly, does not contain harmful substances
- Equipped with SHARP COB LED
- 40000 hour lifespan
- 3 year warranty

Applications

- Residential areas
- Promotional areas
- Hotels
- Supermarkets
- Museums
- Exhibition buildings
- Restaurants & Cafes

Dimensional Drawings

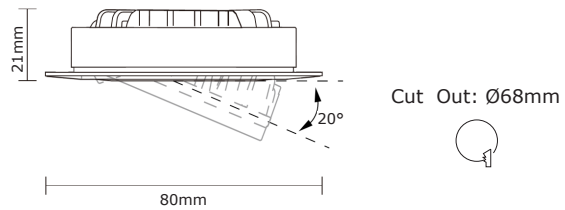


Product Specifications

Product Codes	Power Consumption	Color Temperature	LED Source	Input Voltage	Luminaire Efficiency	Lumens Output	Beam Angle	CRI	Working Temperature
VBL-102-1-25-3K	5.3W	3000K	SHARP	AC220-265V/50hz	85lm/W	450.4lm	25°	>80	-20°C~45°C
VBL-102-1-25-5K	5.3W	5000K	SHARP	AC220-265V/50hz	94.3lm/W	500lm	25°	>80	-20°C~45°C
VBL-102-1-50-3K	5.3W	3000K	SHARP	AC220-265V/50hz	76.8lm/W	406.8lm	50°	>80	-20°C~45°C
VBL-102-1-50-5K	5.3W	5000K	SHARP	AC220-265V/50hz	85.2lm/W	451.6lm	50°	>80	-20°C~45°C


Photometrics

VBL-102-1-25-3K

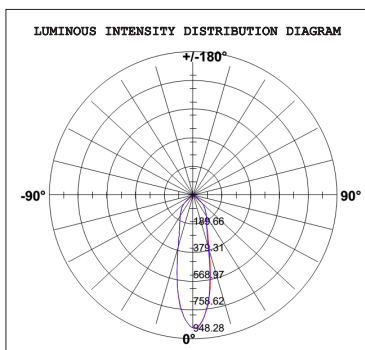

Height (m)	Illuminance (lx)	Diameter (mm)
1	3024	443
2	756	887
3	336	1332
4	189	1775
5	121	2274

VBL-102-1-50-3K

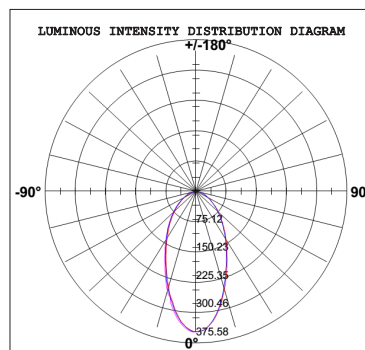

Height (m)	Illuminance (lx)	Diameter (mm)
1	691.8	933
2	172.8	1874
3	76.78	2845
4	43.19	3733
5	27.64	4665

Photometric information available upon request, please contact your sales representative.