



METRO 700


LED RECESSED DIMMABLE DOWNLIGHT



VBLDL-156 Series



Trim Colour




Features/Benefits

- Architecturally designed fitting
- Unique heat-sink design for excellent heat dissipation
- Environmentally friendly, does not contain harmful substances
- Equipped with EPISTAR LED chips
- Dimmable with most leading edge and trailing edge dimmers
- Available in white and brushed chrome trim
- 50,000 hour lifespan
- 3 year warranty

Applications

- Residential
- Hotels
- Museums
- Exhibition Buildings
- Restaurants & Cafes
- Promotional Areas
- Supermarkets
- Nursing Homes
- Hospitals

Dimensional Drawing

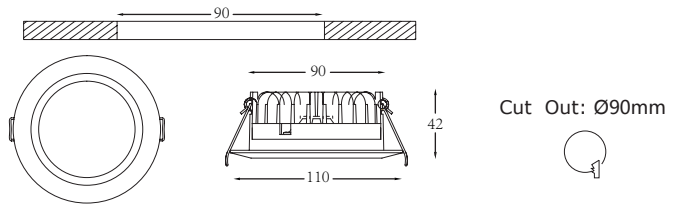


Product Specifications

Product Code	Power Consumption	Color Temperature	LED Current	Input Voltage	Luminaire Efficacy	Lumen Output	Beam Angle	CRI	Working Temperature
VBLDL-156-1-30	12W	3000K	700mA	100-240V AC/50hz	68.43lm/w	741.07lm	107°	>80	-20°C~45°C
VBLDL-156-1-50	12W	5000K	700mA	100-240V AC/50hz	73.12lm/w	826.58lm	107°	>80	-20°C~45°C
VBLDL-156-2-30	12W	3000K	700mA	100-240V AC/50hz	68.43lm/w	741.07lm	107°	>80	-20°C~45°C
VBLDL-156-2-50	12W	5000K	700mA	100-240V AC/50hz	73.12lm/w	826.58lm	107°	>80	-20°C~45°C


Photometrics

VBLDL-156-x-30

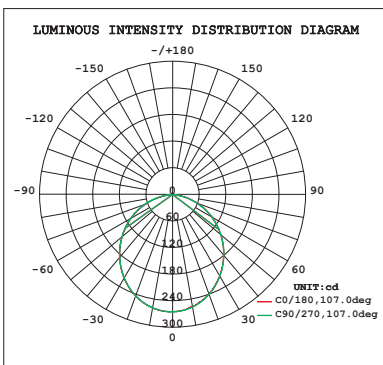

Height (m)	Illuminance(lx)	Diameter(mm)
1	265.6	2701.4
2	66.41	5402.8
3	29.51	8104.1
4	16.6	10805.5
5	10.62	13506.9

VBLDL-156-x-50

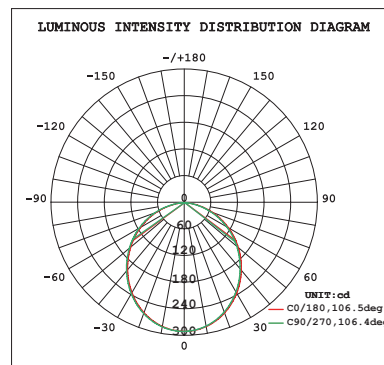

Height (m)	Illuminance(lx)	Diameter(mm)
1	290.0	2671.6
2	72.51	5343.3
3	32.22	8014.9
4	18.13	1068.66
5	11.60	13358.2

Photometric information available upon request, please contact your sales representative