



Features/Benefits

- Architecturally designed fitting
- Unique integrated driver design all
- Environmentally friendly, does not contain harmful substances
- Equipped with EPISTAR LED chips
- Dimmable with most leading edge and trailing edge dimmers
- Available in warm white (3000K) and cool white (5000K)
- 50,000 hour lifespan
- 3 year warranty

Applications

- Residential
- Promotional areas
- Hotels
- Supermarkets
- Museums
- Exhibition buildings
- Restaurants & Cafes


VBLDL-180 SERIES



Trim Colour



Dimensional Drawings

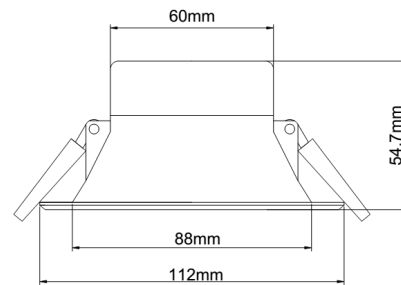

Cut Out: Ø90mm





Product Specifications

Product Codes	Power Consumption	Color Temperature	LED Source	Input Voltage	Luminaire Efficiency	Lumens Output	Beam Angle	CRI	Working Temperature
VBLDL-180-1-30	12W	3000K	EPISTAR	AC220-265V/50hz	73.5lm/W	882lm	110°	>80	-20°C~45°C
VBLDL-180-1-50	12W	5000K	EPISTAR	AC220-265V/50hz	76.6m/W	920lm	110°	>80	-20°C~45°C

Photometrics

VBLDL-180-1-30

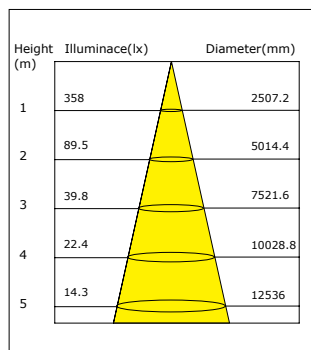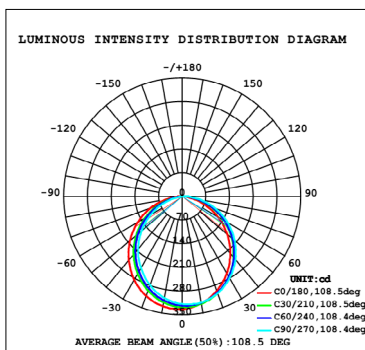

VBLDL-180-1-50

